




DATA SHEET

PEDESTAL EXTENSION

PRIME

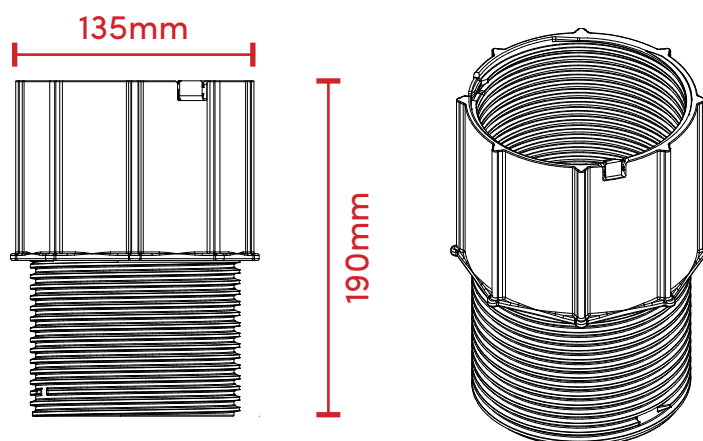

TECHNICAL SPECIFICATION:

Supply and installation of extensions for raised floors type "Pedestal PRIME" adjustable in height. The extensions are composed of a body having both external and internal threads and are provided with anti-screwing locks. The total height is 190mm. This product must be combined with Pedestal Prime=PR3

CHARACTERISTICS:

Double height adjustment
Anti-screwing safety lock

RAW MATERIAL:

Polypropylene

ENVIRONMENTAL IMPACT:

recyclable material - not dangerous

FIELD OF USE (ASSOCIATED SUPPORT):

PR3 - Pedestal Prime support

GENERAL CHARACTERISTICS & PROPERTIES

	UNIT	VALUE	TOLERANCE +/-
EXTERNAL DIAMETER	mm	135	+/- 1.0
HEIGHT	mm	190	+/- 0.2
SHORE	Shore d	70	+/- 3
WEIGHT	Kg	0.34	+/- 0.02
FIRE REACTION*	UNI-EN 13501-1:2009	classeE	
LOW T(°C) REACTION	°C	-40	

*Tests made by Giordano S.p.A. Institute of Bellaria-Igea Marina (RN)-Italy

EXTENSION COMPOSITIONS WITH PR3 SUPPORT

COD:E501000190	HEIGHT	PZ PER BOX
PR3 + 1 Extension PPR	310-595mm	12PR3 + 12PPR
PR3 + 2 Extension PPR	410-770mm	12PR3 + 2X12PPR
PR3 + 3 Extension PPR	515-945mm	12PR3 + 3X12PPR

The packaging of the supports consists of cardboard boxes. The final packaging of the pallets is made with the wrapping of a polyethylene film. Indoor storage, protected from precipitation, is recommended.

INSTALLATION METHOD: The product is laid dry, without the need for adhesives or other types of fixings.

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.