

Aquastop Green

Anti-Cracking Waterproof Membrane

Key Features:

- Withstands uncured screeds, suitable for fast-track construction and renovation
- Compensates thermal and humidity stress, prevents damage from movement or shrinkage
- Immediate tile installation, no waiting time between membrane and tiling
- Multi-layer polymer system, high mechanical strength and flexibility

VOC Ratings / Eco Notes


- VOC 5 g/kg
- Recyclable
- Anti-mould

Certifications / Ratings

- GreenBuilding Rating 5
- EC1 Plus GEV Ecode
- ANSI A118.12 (TCNA test)

Available in Rolls: 1.15m – 20m

Thickness: approx:	approx. 4 mm
Resistance to Strain:	1.8 N/mm ²
Watertightness:	60 kPa
Coverage:	1.15 m width x 20 m rolls

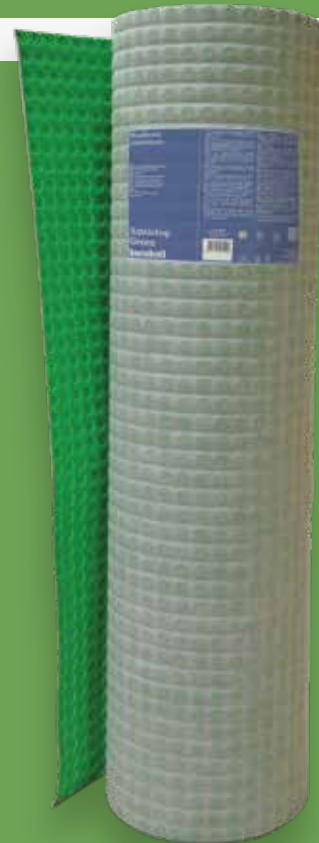

Warning: Professional use only. Follow system detailing and ensure full adhesion before tiling.